


► (RTS) Standard Bayonet Type  
RTS-M08X08-L030-K02.M.0230




Max. operating temperature : -50 °C / +200 °C  
Standard cable types : Silicone + Silicone  
Sensor type : DIN/EN60751 Class "B" 1 x PT-100  
Protection tube material : Aluminum

► Technical drawing

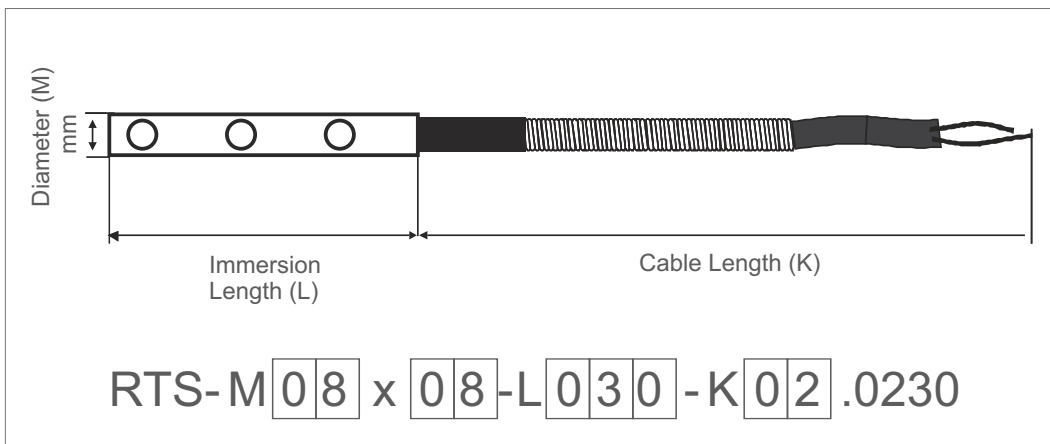

PT-100 Connections



Diameter (M) : 08 x 08 mm  
Immersion Length (L) : 30 mm  
Cable Length (K) : 2 meter